

MEGA SAFETY

MAKE WORK SIMPLE MAKE WORKERS SAFE



MEGA SAFETY

Nantong Mega Safety Products Co., LTD

Add: No.108 Wei'er Road, Chengdong Town, Hai'an City, Nantong City, Jiangsu Province, China

Web: www.megasafety.com

Tel: +86-513-81183689 Mobile: +86 136 2154 8480

Email: info@megasafety.com

2026

GLOVE CATALOG

MAKE WORK SIMPLE MAKE WORKERS SAFE



MEGA SAFETY

MEGA SAFETY

Mega Safety has been focusing on PPE industry and dedicated to glove manufacturing for over a decade. We houses the entire PPE glove industrial chains to control the quality of each production process, comprising spinning, yarn wrapping, knitting, dipping and packaging.

We devote ourselves to manufacturing high quality gloves and developing new designs with innovation. Now we can offer a comprehensive line of products including Latex, Nitrile, PU coated gloves, knitting, and sewing gloves. As a result, we have an annual combined production capacity of 3000,000 dozen pairs.





1. Spinning



2. Yarn Wrapping



3. Glove Knitting



4. Dipping Production



5. Warehousing

Manufacturing

Mega Safety set up headquarter in Nantong with four our own running professional factories based in Linyi and Ji yuan, to combine high technique of Nantong and low cost in Shandong and Henan. These four factories are all specializing in PPE manufacturing including yarn spinning, fabric processing, seamless knitting and automatic dipping.

Innovation Leads the Future

“Safety” in Mega Safety is more than a word, it is the credo ingrained in our DNA. Continuously R&D plays a critical role in our innovation process. It's a lasting investment in future capabilities which is transformed into new materials, new products, and production processes that help improve performance and protection.

Quality defines safety

Our quality control starts from the first step of yarn material production and goes through every single process of PPE manufacturing. We have established perfect product quality control inspection standards and methods, covering IQC, IPQC, OQC, FQC whole process. And our plants are all certified by the ISO9001 quality management system and BSCI system.

Certificates add values

Mega safety is committed to enhancing our product value added through stringent international certificate. All our products are authenticated by European CE, American standard ANSI for superior quality.



Technologies Make Gloves Different

The workforce continually asks for gloves that are more comfortable whilst on the other side there is a focus to reduce injuries, the costs associated with those injuries and to improve worker efficiency. Therefore Mega safety is constantly developing our products based on pioneering technologies.

MEGA-GRIP™

Textured Latex Coating Technology

High Abrasion coating technology ensures mega safety gloves the best-in-class grip and providing high abrasion resistant performance in both dry and damp working conditions. Ergonomic shaped design to match the natural contour of the hand, can effectively reduce the hand fatigue.



♦ Mega-grip coating surface

Flat Crinkles make liner and latex tightly combined together in order to increase abrasion.



♦ Normal Glove Dipping Surface

Stereo crinkles look nice, but the abrasion resistance is weaker.




MEGA-AIR™

Micro Foam Nitrile Coating Technology

Mega-Air tech Micro-foam nitrile coating offers 360° breathability.

Micro-foam Nitrile Coating technology gives Mega Safety gloves a thin layer of breathable “skin” that optimized strong grip and abrasion resistance performance. It enables inner working hands to breath freely through micropore structure, and therefore super comfortable for long time wearing.

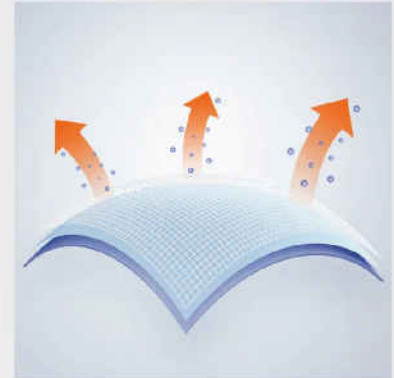

MEGA-DURA™

Foam sandy coating technology

Foam sandy coating technology equipped with a unique tough coating guarantees exceptional durability. The multilayer design of the nitrile foam coating ensures an effective grip when working in wet and oily conditions, while maintaining a high level of flexibility and outstanding tactile soft feel and wearer comfort.

Water or oil can not be permeated.



Mega-grip tech sandy coating layer

Smooth nitrile coating layer

Glove liner layer

Rough sandy surface enhanced the grip and abrasion



Standard Guidance

Brand



Item No. & Size

51355 9/L

Standards



CE-CATEGORIES



CATEGORY 1

Gloves in this category are intended to provide protection against low-risk situations, that might occur during, for example, the washing of clothes or dishes, but also from hot objects with temperatures up to +50°C. Also suitable for light gardening and other work where there is a risk of minor injury.

CATEGORY 2

Gloves in this category are intended to protect the user from medium-severity injuries. The gloves must be marked with a pictogram showing the gloves' protection properties, and they have been tested according to the standard EN388 (mechanical protection) at an accredited test institute. All category 2 gloves are validated and type-certified by a notified body to show the validity of protection.

CATEGORY 3

Gloves in this category provide protection against risks that may cause very serious consequences such as death or irreversible damage to health. The gloves must be marked with pictograms showing the gloves' protection properties, and they must have been tested at an accredited test institute. They must also have been validated and certified, for both type and production control, by a notified body to show the validity of protection. Category 3 gloves include all chemical protection gloves, but heat protection gloves can also be classified in this category.

EN 420:2003 + A1:2009

PROTECTIVE GLOVES –
GENERAL REQUIREMENTS AND
TEST METHODS



EN 420:2003
+A1:2009

This standard defines the general requirements that apply to all protective gloves, and also sets requirements for glove-marking.

- ▶ The glove itself shall not constitute a risk to, or cause injuries to, the user.
- ▶ The glove material shall have a pH value between 3.5 and 9.5.
- ▶ The chromium VI level in the glove leather must stay at 2.9 mg/kg or below.
- ▶ If the glove contains any substances known to cause allergic reactions, this must be stated in the product information.
- ▶ The glove sizes are standardized according to minimum length.

There are no pictograms for EN 420:2003 + A1:2009.

EN ISO 21420:2020

PROTECTIVE GLOVES – GENERAL REQUIREMENTS AND TEST METHODS



EN ISO 21420:2020

EN ISO 21420:2020 Protective gloves – General requirements and test methods is the new general requirements standard for protective gloves and will be used instead of EN420 for newly developed GUIDE gloves from Autumn 2020 and onwards.

Some of the key requirements listed under this standard are glove design and construction, chemical innocuousness, sizing, dexterity and information supplied by the manufacturer. Chemical innocuousness is considered to ensure that protective gloves do not adversely affect the health or hygiene of the wearer. The materials present in the gloves must not, under foreseeable conditions of normal use, release substances generally known to be toxic, toxic to reproduction, carcinogenic, mutagenic, allergenic, corrosive, sensitising or irritating. Requirements include:

- ▶ Azo colorants - applicable for all dyed leather and textiles
- ▶ Chrome VI - applicable for leather
- ▶ Nickel release - applicable for metallic components
- ▶ DMF - applicable for PU (Polyurethane) gloves and materials
- ▶ PAH - for plastic and rubber gloves and materials with skin contact
- ▶ pH value - all materials and all gloves

If electrostatic properties are claimed for protective gloves intended to be worn in areas that present explosive or flammable risks, they must be tested in accordance with EN 16530:2014. There will be gloves in GUIDE's assortment relating to both the old and the new version.

EN 388:2016

GLOVES THAT PROVIDE PROTECTION AGAINST MECHANICAL RISKS



EN 388:2016

1234BP

- 6. IMPACT PROTECTION
(MARKING IF PASSED
REQUIREMENTS)
- 5. CUT RESISTANCE, TDM TEST
- 4. PUNCTURE RESISTANCE
- 3. TEARING STRENGTH
- 2. CUT RESISTANCE, COUP TEST
- 1. ABRASION RESISTANCE

According to this standard, characteristics such as abrasion resistance, cut resistance, tearing strength, puncture resistance and impact protection are tested. In conjunction with the pictogram, four numbers and one or two letters will be displayed. These signs indicate the performance of the glove.

1. ABRASION RESISTANCE

The material is subjected to abrasion by sandpaper under a predetermined pressure. The protection level is indicated on a scale of 1 to 4 depending on the number of turns required until a hole appears in the material. The higher the number, the better the resistance to abrasion.

2. CUT RESISTANCE, COUP TEST

A knife is run across the glove material until it cuts through. The protection level is given by a number between 1 and 5, where 5 indicates the highest cut protection. If the material dulls the knife during this test, the cut test ISO 13997(TDM test) shall be performed instead, see point 5.

3. TEARING STRENGTH

The force required to tear the glove material apart is measured. The protection level is indicated by a number between 1 and 4, where 4 indicates the strongest material.

4. PUNCTURE RESISTANCE

Based on the amount of force required to puncture the material with a pointed object. The protection function is indicated by a number between 1 and 4, where 4 indicates the strongest material.

5. CUT RESISTANCE, TDM TEST ISO 13997

If the knife becomes dulled during the coup test, see point 2, this test shall be performed instead. The result is given by a letter, A to F, where F indicates the highest level of protection. If any of these letters is given, this method determines the protection level instead of the coup test.

ISO 13997:1999 – Determination of resistance to cutting by sharp objects

An alternative cut test recommended for cut protection gloves. Shall be used in EN388:2016 for cut protection gloves where the cut material dulls the cutting knife during testing. A knife cuts with constant speed but increasing force until it breaks through the cut protection material. The level of protection is given in newtons, reflecting the force needed for cutting through the material at a length of 20mm.

6. IMPACT PROTECTION

If the glove has impact protection, this information is given by the letter P as the 6th and final character. If there is no P sign, no impact protection is claimed.

EN 388:2003

This is the old version of the standard for mechanical risks. The differences compared to the 2016 version are the paper grid in the abrasion test and how to perform testing of cut resistant fibers. Neither is the older version applicable for the testing of impact protection. There are still many protective gloves on the market labeled according to the old version of this standard. These are as good to use as the newly labeled gloves. It is important to understand that it is not the gloves' performance that has changed, it is the way of testing the performance that has changed!

EN 511:2006

GLOVES THAT PROVIDE PROTECTION AGAINST COLD



EN 511:2006

1 2 3

- 3. WATER PENETRATION
- 2. CONTACT COLD
- 1. CONVECTIVE COLD

In cold environments, it is particularly important to protect the hands from cold burns. This standard measures how well the glove can withstand both convective cold and contact cold. In addition, water permeation after 30 minutes is also tested.

1. PROTECTION AGAINST CONVECTIVE COLD

Performance level 0-4.

2. PROTECTION AGAINST CONTACT COLD

Performance level 0-4.

3. PROTECTION AGAINST WATER PENETRATION

Performance 0 or 1, where 0 indicates "water penetration after 30 minutes" and 1 indicates "no water penetration after 30 minutes"

EN 407:2004

GLOVES THAT PROVIDE PROTECTION AGAINST THERMAL RISKS (HEAT AND/OR FIRE)



EN 407:2004

1 2 3 4 5 6

- 6. LARGE QUANTITIES OF MOLTEN METAL
- 5. SPLASHES OF MOLTEN METAL
- 4. RADIANT HEAT
- 3. CONVECTIVE HEAT
- 2. CONTACT HEAT
- 1. FIRE PROPERTIES

This standard specifies requirements and test methods for gloves that shall provide protection against heat and/or fire. The numbers stated next to the pictogram indicate the glove's performance for each test in the standard. The higher the number, the better the performance level.

1. FIRE PROPERTIES OF THE MATERIAL

The ignition time and how long the material glows or burns after ignition is measured in this test. If the seam comes apart after an ignition time of 15 seconds, the glove has failed the test. Performance level 1-4.

2. CONTACT HEAT

The glove is exposed to temperatures between +100°C to and +500°C. The next measurement is the length of time it takes for the inner side of the glove to become 10°C warmer than it was from the beginning (about 25°C). The glove must withstand the increasing temperature of maximum 10°C for at least 15 seconds for an approval. Performance level 1-4.

3. CONVECTIVE HEAT

This measures how long it takes to increase the inside temperature of the glove by 24°C, using a gas flame (80kW/m²). Performance level 1-4.

4. RADIANT HEAT

This measures the average time for heat permeation at 2.5 kW/m². Performance level 1-4.

5. SMALL SPLASHES OF MOLTEN METAL

This test is based on the number of drops of molten metal that generates a temperature increase of 40°C between the glove material and the skin. Performance level 1-4.

6. LARGE QUANTITIES OF MOLTEN METAL

PVC film is attached to the back of the glove material. Molten iron is poured onto the material. The measurement indicates how many grams of molten iron are required to damage the PVC film. Performance level 1-4.

EN ISO 374-1:2016

GLOVES THAT PROVIDE
PROTECTION AGAINST
DANGEROUS CHEMICALS AND
MICRO-ORGANISMS



EN ISO 374-1:2016
Type A
ABCDEF



EN ISO 374-1:2016
Type B
ABC



EN ISO 374-1:2016
Type C

The test chemicals are listed in the table to the right, and all 18 chemicals shall be tested for permeation according to EN 16523-1:2015.

Chemicals can cause serious harm to both personal health and the environment. Two chemicals, each with known properties, can cause unexpected effects when they are mixed. This standard gives directives for how to test degradation and permeation for 18 chemicals, but doesn't reflect the actual duration of protection in the workplace or the differences between mixtures and pure chemicals.

This standard specifies the requirements for a glove to provide protection against dangerous chemicals and micro-organisms. The shortest allowable length that is liquid-tight shall correspond to the minimum length of the gloves as specified in EN 420:2003 + A1:2009.

PENETRATION

Chemicals can penetrate through holes and other defects in the glove material. For a glove to be approved as a chemical protection glove, the glove shall not leak water or air during penetration-testing, EN 374-2:2014.

DEGRADATION

The glove material could be negatively affected by chemical contact. Degradation shall be determined according to EN 374-4:2013 for each chemical. The degradation result, stated as a percentage (%), shall be reported in the user instruction.

PERMEATION

Chemicals break through the glove material at a molecular level. The breakthrough time is evaluated, and the glove must withstand a breakthrough time of at least:

- ▶ Type A – 30 minutes (level 2) against minimum 6 test chemicals
- ▶ Type B – 30 minutes (level 2) against minimum 3 test chemicals
- ▶ Type C – 10 minutes (level 1) against minimum 1 test chemical

The third row in the pictogram for Types A and B indicates which chemicals the glove provides protection against (see table below). Type C does not have a third row, and can only withstand 1 chemical for a short while.

CODE- LETTER	CHEMICAL	CAS NUMBER	CLASS
A	Methanol	67-56-1	Primary alcohol
B	Acetone	67-64-1	Ketone
C	Acetonitrile	75-05-8	Nitrile compound
D	Dichloromethane	75-09-2	Chlorinated hydrocarbon
E	Carbon disulphide	75-15-0	Sulphur containing organic compound
F	Toluene	108-88-3	Aromatic hydrocarbon
G	Diethylamine	109-89-7	Amine
H	Tetrahydrofuran	109-99-9	Heterocyclic and ether compound
I	Ethyl acetate	141-78-6	Ester
J	n-Heptane	142-82-5	Saturated hydrocarbon
K	Sodium hydroxide 40%	1310-73-2	Inorganic base
L	Sulphuric acid 96%	7664-93-9	Inorganic mineral acid, oxidizing
M	Nitric acid 65%	7697-37-2	Inorganic mineral acid, oxidizing
N	Acetic acid 99%	64-19-7	Organic acid
O	Ammonium hydroxide 25%	1336-21-6	Organic base
P	Hydrogen peroxide 30%	7722-84-1	Peroxide
S	Hydrofluoric acid 40%	7664-39-3	Inorganic mineral acid
T	Formaldehyde 37%	50-00-0	Aldehyde

EN 374-5:2016

GLOVES THAT PROVIDE
PROTECTION AGAINST
MICRO-ORGANISMS



EN 374-5:2016

All gloves must be tested against micro-organisms. Gloves are tested for protection against bacteria and fungi, but also viruses if requested, according to EN 374-5:2016.

EN ISO 10819:2013

MECHANICAL VIBRATION AND
SHOCK – HAND-ARM VIBRATION
– MEASUREMENT AND
EVALUATION OF THE VIBRATION
TRANSMISSIBILITY OF GLOVES
AT THE PALM



EN ISO 10819:2013 / A1:2019
TRM: X TRH: Y

The standard is designed to measure the vibration transmissibility from a vibrating handle – through a glove – to the palm. The test is performed in one-third octave frequency bands, with center frequencies of 25Hz to 1250Hz.

To be described as an anti-vibration glove, the following criteria must be met:

- ▶ TRM value shall be less than or equal to ≤ 0.9 (total vibration transmission between 25 Hz-200Hz)
- ▶ TRH value shall be less than or equal to ≤ 0.6 (total vibration transmission between 200Hz-1.25kHz)
- ▶ The thickness of the damping material in the palm shall not exceed a thickness of 8mm. It must also cover the whole palm and the full length of the thumb and fingers.

These requirements indicate that the vibrations do not increase in the medium frequency range (TRM), and are reduced by at least 40% in the high frequency range (TRH).

Note that these gloves can reduce the health risks related to vibration exposure, such as white fingers, but they do not eliminate the risks. The gloves reduce the vibrations, but only in frequencies above 150Hz. The vibration dampening properties may also be affected by aging, moisture absorption, temperature and high contact pressure.

EN 12477:2001

PROTECTIVE GLOVES FOR
WELDERS



EN 12477:2001
Typ A



EN 12477:2001
Typ B

This standard describes how gloves should be designed to provide hand and wrist protection in welding and similar work situations. Welding gloves shall be tested according to EN 388:2016. They must also provide protection against splashes of molten metal, short-term exposure to open flames, radiant heat, contact heat and mechanical protection according to EN 407:2004.

The gloves are also assessed according to its design and purpose:

- ▶ Type A refers to gloves with higher protection against heat but with lower flexibility and dexterity
- ▶ Type B refers to gloves with lower protection against heat but with greater flexibility and dexterity

EN 12477:2001 has no pictogram.

ESD-IEC 61340-5-1:2016

PROTECTION OF ELECTRONIC
DEVICES FROM ELECTRONIC
PHENOMENA

SS IEC 61340-5-1

To protect electronic devices from electrostatic discharge, it is important to use gloves (and other equipment) adapted to the environment.


The material's vertical resistance between hand and electrode is tested and measured. The resistance shall be as low as possible so that electrical charges pass through the material instead of accumulating, resulting in the risk of sudden discharge. This could cause the destruction of nearby sensitive electronics. The resistance of the material shall be below $10^9\Omega$ to be approved.

For full protection of electrical devices, ESD-labeled gloves shall be used with other ESD equipment, such as clothes, shoes, bracelets, etc.

SIZE GUIDANCE



Place your hand on top of the silhouette to see what size glove you will need. Getting the right size is key for working safety and needs to be a comfortable fit.

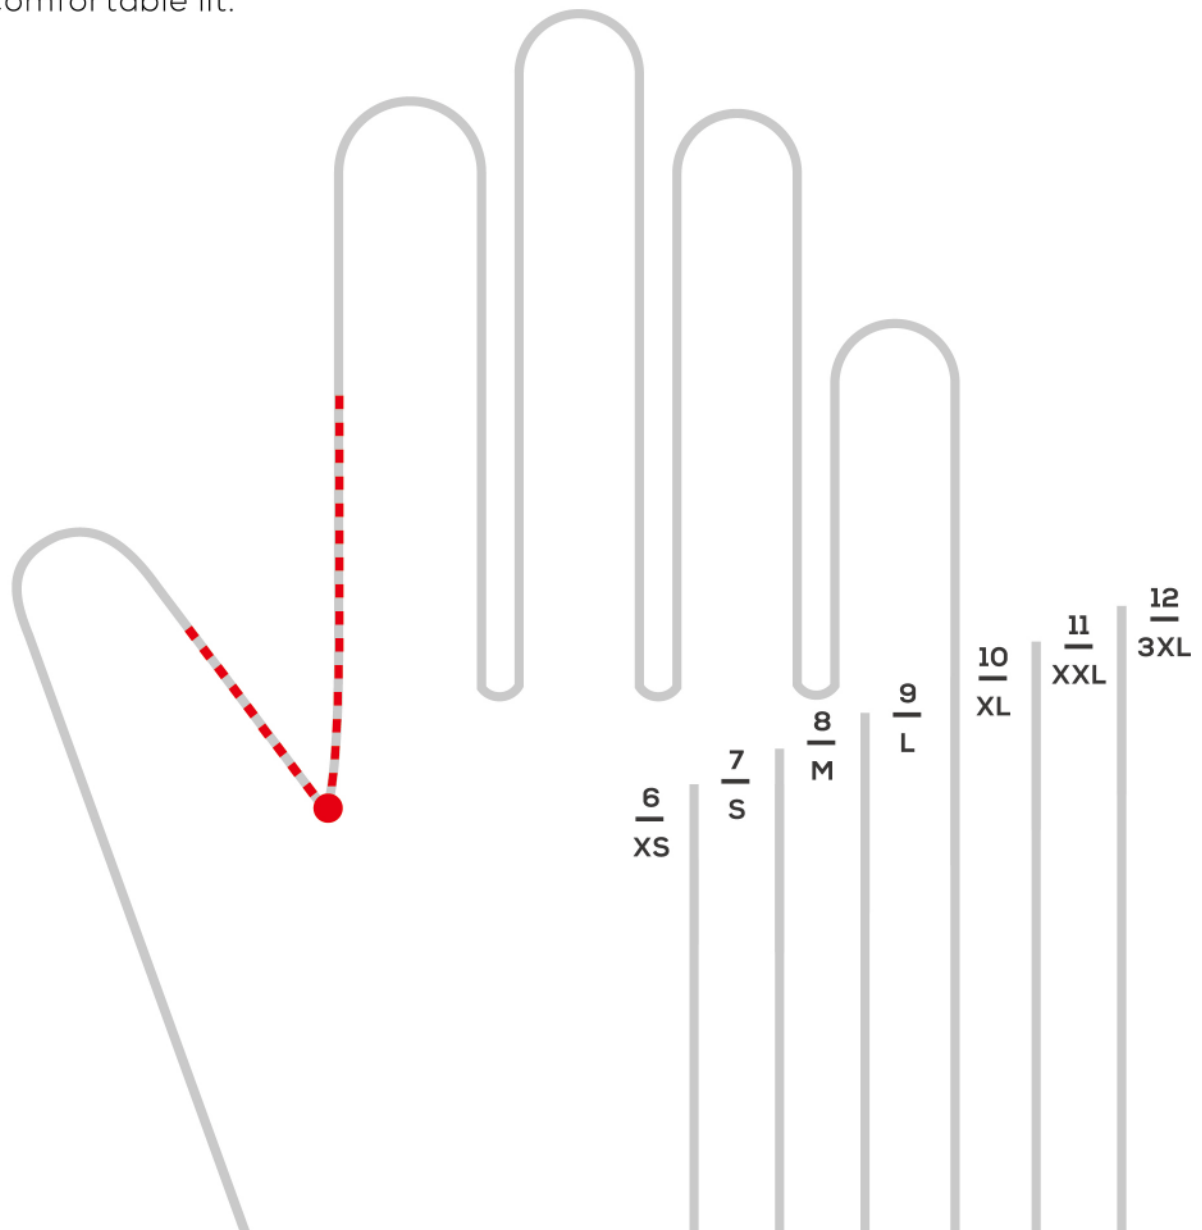

ICON INTERPRETATION

Features



Comfort & Fit



Soft feel



Flexibility



Light weight



Breathability



High-abrasion



Strong grip



Super durable



Oil-proof



Waterproof



Cut resistance



Thermal



Impact



Chemical resistant



Anti-static



Touch screen



High visibility



Ergonomically shaped



Reinforced thumb area



Latex free



Heat resistant



Puncture resistance



Recycled



Food contact



Flame resistant



Applications



Automobile



Electronics



Mechanical
Processing



Facility
Maintenance



Transportation
& Warehousing



Glass &
Metal Handling



Construction



Oil & Gas



Agriculture &
Gardening



Cold
Environment



Marine



Food Industry



Mining Industry



Chemical
Industry

PRODUCTS INDEX

NITRILE SERIES

Micro-foam Nitrile Coated

57505



P 18



57505D



P 18



51505



P 19



51505D



P 19



52521



P 19



53521



P 20



51500



P 20



77500



P 20



Sandy Nitrile Coated

65304



P 21



65505



P 21



65506T



P 22



71504



P 22



65805



P 22



72500



P 23



Smooth Nitrile Coated

64304



P 24



61304



P 24



64304U



P 25



64303



P 25



76412



P 25



76413



P 26



76413Y



P 26



CUT RESISTANT SERIES

13 GAUGE CUT

30315



P 28



30324



P 28



30317



P 29



30328



P 29



30334  EN388  4X43E P 29	30350  EN388  4X42F P 30	64317  EN388  4X43D P 30	11317  EN388  2X42D P 30
51317  EN388  4X43D P 31	68317R  EN388  4X43D P 31	72317  EN388  4X43D P 31	71334R  EN388  4X43E P 32
65323R  EN388  4X42C P 32	65328  EN388  4X42D P 32	51334R  EN388  4X42E P 33	51350  EN388  4X43F P 33
65353  EN388  4X43F P 33	51355  EN388  4X43F P 34		

15 GAUGE CUT

65536R  EN388  4X43D P 34	65554  EN388  4X43E P 35	65557  EN388  4X43F P 35	65558  EN388  4X43F P 35
---	---	--	---

18 GAUGE CUT

30835R  EN388  4X42D P 36	51831R  EN388  4X41B P 36	51829  EN388  4X42C P 37	51835R  EN388  4X42D P 37
51860T  EN388  4X42E P 37	51861T  EN388  4X42F P 38	51862  EN388  4X43F P 38	

21 & 24 GAUGE CUT

51170  EN388  3X32C P 39	57171R  EN388  3X32D P 39	51172  EN388  3X32E P 40
65178  EN388  3X32F P 40	57473R  EN388  3X32F P 40	

WET & COLD RESISTANT SERIES

11214



P 42



23622



P 42



22501



P 43



22920



P 43



22937



P 43



70920



P 44



71920



P 44



GENERAL PURPOSE SERIES

LATEX COATED-Crinkle Finished

11304



P 46



11007



P 46



LATEX COATED-Foam Finished

15304



P 47



15303



P 47



PU COATED

30300



P 48



30304



P 48



30306



P 49



30802T



P 49



30504B



P 49



KNITTING SERIES

87760



P 51



87765



P 51



87780D



P 52



87045



P 52



87004D



P 52



89343



P 53



893FY



P 53



89388



P 53



IMPACT SERIES

51323VL



65317VL



65554VL



65351VL



02317VL



CHEMICAL SERIES

47501



43501



78800



78835



91835



91835V



SUSTAINABLE SAFETY SERIES

GRS GLOVES

51541G



65542G



65323G



FOOD CONTACT GLOVES

88536



88345



36500



95323



BAMBOO & ANTI-BACTERIAL GLOVES

15319



18304AB



NITRILE SERIES



NITRILE

Micro-foam Nitrile Coated

57505

15G grey nylon/spandex liner with black washed micro foam nitrile palm coating

► SPECIFICATIONS

Gauge	15G
Liner	Nylon, spandex
Coating	Nitrile, Washed Micro Foam, Palm coated
Size	7-12
EN388	4131X

► FEATURES



► APPLICATIONS



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100

57505D

15G grey nylon/spandex liner with black washed micro foam nitrile palm coating with dots

► SPECIFICATIONS

Gauge	15G
Liner	Nylon, spandex
Coating	Nitrile, Washed Micro Foam, Dots, Palm coated
Size	7-12
EN388	4131X

► FEATURES



► APPLICATIONS



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100

51505

15G grey nylon/spandex liner with black micro foam nitrile palm coating

► SPECIFICATIONS

Gauge	15G
Liner	Nylon, spandex
Coating	Nitrile, Micro Foam, Palm coated
Size	7-12
EN388	4131X

► FEATURES



► APPLICATIONS



51505D

15G grey nylon/spandex liner with black unwashed micro foam nitrile palm coating with dots

► SPECIFICATIONS

Gauge	15G
Liner	Nylon, spandex
Coating	Nitrile, Micro Foam, Dots, Palm coated
Size	7-12
EN388	4131X

► FEATURES



► APPLICATIONS



52521

15G yellow polyester/spandex liner with 3/4 coverage black micro foam nitrile coating

► SPECIFICATIONS

Gauge	15G
Liner	Nylon/spandex
Coating	Nitrile, Micro Foam, 3/4 Coverage Coated
Size	7-12
EN388	4121X

► FEATURES



► APPLICATIONS



53521

15G red polyester/spandex liner with full coverage black micro foam nitrile coating

► SPECIFICATIONS

Gauge	15G
Liner	Polyester/spandex
Coating	Nitrile, Micro Foam, Full coverage coated
Size	7-12
EN388	4121X

► FEATURES**► APPLICATIONS****51500**

15G white/black nylon liner with grey/black micro foam nitrile palm coating

► SPECIFICATIONS

Gauge	15G
Liner	Nylon
Coating	Nitrile, Micro Foam, Palm coated
Size	7-12
EN388	4131X

► FEATURES**► APPLICATIONS****77500**

15G nylon liner with full-coverage smooth nitrile coated plus microfoam nitrile palm coated glove

► SPECIFICATIONS

Gauge	15G
Liner	Nylon
Coating	Nitrile, smooth+Micro Foam, Full coated
Size	7-12
EN388	4131X

► FEATURES**► APPLICATIONS**

NITRILE

Sandy Nitrile Coated

65304

13G red polyester liner with black foam sandy nitrile palm coating

► SPECIFICATIONS

Gauge	13G
Liner	Polyester
Coating	Nitrile, Sandy foam, Palm coated
Size	7-12
EN388	4121X

► FEATURES



► APPLICATIONS



EN388
4121X

65505

15G grey nylon/spandex liner with black foam sandy nitrile palm coating

► SPECIFICATIONS

Gauge	15G
Liner	Nylon/spandex
Coating	Nitrile, Sandy foam, Palm coated
Size	7-12
EN388	4131X

► FEATURES



► APPLICATIONS



EN388
4131X

65506T

15G Nylon/spandex/carbon liner with black foam sandy nitrile palm coating with touchscreen and anti-static function

► SPECIFICATIONS

Gauge	15G
Liner	Nylon/spandex/carbon filament
Coating	Nitrile, Sandy foam, Palm coated
Size	7-12
EN388	4131X

► FEATURES



► APPLICATIONS



71504

15G black polyester liner with blue smooth nitrile 3/4 coverage coating plus black sandy foam nitrile palm coating, fully thumb coated

► SPECIFICATIONS

Gauge	15G
Liner	Polyester
Coating	Nitrile, Sandy foam, 3/4 coverage coated
Size	7-12
EN388	4131X

► FEATURES



► APPLICATIONS



65805

18G blue nylon/spandex liner with black foam sandy nitrile palm coating

► SPECIFICATIONS

Gauge	18G
Liner	Nylon/spandex
Coating	Nitrile, Sandy foam, Palm coated
Size	7-12
EN388	4121X

► FEATURES



► APPLICATIONS



72500

15G nylon liner with fully smooth nitrile plus black foam sandy nitrile palm coated

► SPECIFICATIONS

Gauge	15G
Liner	Nylon
Coating	Nitrile, smooth/Sandy, Full coated
Size	7-12
EN388	4131X

► FEATURES



► APPLICATIONS



CE



EN388



4131X

NITRILE

Smooth Nitrile Coated

64304

13gauge polyester liner with smooth nitrile palm coated

► SPECIFICATIONS

Gauge	13G
Liner	Polyester
Coating	Nitrile, Smooth nitrile, Palm coated
Size	7-12
EN388	4121X

► FEATURES



► APPLICATIONS



61304

13gauge black polyester liner with fully smooth nitrile coated

► SPECIFICATIONS

Gauge	13G
Liner	Polyester
Coating	Nitrile, Smooth nitrile, full coated
Size	7-12
EN388	4121X

► FEATURES



► APPLICATIONS



64304U 13G U3 knitted polyester liner with black smooth nitrile palm coated

► SPECIFICATIONS

Gauge	13G
Liner	Polyester
Coating	Nitrile, Smooth nitrile, palm coated
Size	7-12
EN388	4121X

► FEATURES



► APPLICATIONS



64303 13gauge floral pattern polyester with smooth nitrile palm coated

► SPECIFICATIONS

Gauge	13G
Liner	Polyester
Coating	Nitrile, Smooth nitrile, palm coated
Size	7-12
EN388	4121X

► FEATURES



► APPLICATIONS



76412 Cotton jersey liner safety cuff with heav blue smooth nitrile coating, safety cuff

► SPECIFICATIONS

Liner	Cotton jersey
Coating	Nitrile, 3/4, Full coverage coated
Size	7-12
EN388	3121X

► FEATURES



► APPLICATIONS



76413

Cotton jersey liner knitted cuff with heavy blue smooth nitrile coated, knitted cuff

► SPECIFICATIONS

Liner	Cotton jersey
Coating	Nitrile, 3/4, Full coverage coated
Size	7-12
EN388	3121X

► FEATURES



► APPLICATIONS



76413Y

Cotton jersey liner knitted cuff with yellow smooth nitrile coated, knitted cuff

► SPECIFICATIONS

Liner	Cotton jersey
Coating	Nitrile, 3/4, Full coverage coated
Size	7-12
EN388	3121X

► FEATURES



► APPLICATIONS





CUT RESISTANT SERIES

CUT RESISTANT SERIES

13 GAUGE CUT

30315

13gauge HPPE/nylon/spandex with grey PU palm coated

► SPECIFICATIONS

Gauge	13G
Liner	HPPE/spandex/polyester
Coating	PU, Palm coated
Size	7-12
EN388	4443B

► FEATURES



► APPLICATIONS



30324

13gauge nylon/glass fiber/spandex with grey PU palm coated

► SPECIFICATIONS

Gauge	13G
Liner	Nylon/glass fiber/spandex
Coating	PU, Palm coated
Size	7-12
EN388	4X43C

► FEATURES



► APPLICATIONS



30317

13gauge HPPE/glass fiber liner with grey PU palm coated glove

► SPECIFICATIONS

Gauge	13G
Liner	HPPE/glass fiber
Coating	PU, Palm coated
Size	7-12
EN388	4X43D

► FEATURES



► APPLICATIONS



30328

13G HPPE/glass fiber/steel/polyester knitted liner with white PU palm coating

► SPECIFICATIONS

Gauge	13G
Liner	HPPE/steel/glass liner/polyester
Coating	PU, Palm coated
Size	7-12
EN388	4X43D

► FEATURES



► APPLICATIONS



30334

13G grey HPPE/steel/glass fiber liner with grey PU palm coating

► SPECIFICATIONS

Gauge	13G
Liner	HPPE/Steel/glassfiber/Polyester/Spandex
Coating	PU, Palm coated
Size	7-12
EN388	4X43E

► FEATURES



► APPLICATIONS



30350

13G HPPE/steel/polyester/nylon/spandex liner with PU palm coated

SPECIFICATIONS

Gauge	13G
Liner	HPPE/steel/polyester/nylon/spandex
Coating	PU, Palm coated
Size	7-12
EN388	4X42F

FEATURES



APPLICATIONS



64317

13G HPPE/glass fiber/nylon liner with black smooth nitrile palm coated

SPECIFICATIONS

Gauge	13G
Liner	HPPE/glass fiber
Coating	Nitrile, Smooth nitrile, Palm coated
Size	7-12
EN388	4X43D

FEATURES



APPLICATIONS



11317

13G grey HPPE/glass fiber liner with black crinkled latex palm dipped

SPECIFICATIONS

Gauge	13G
Liner	HPPE/glass fiber
Coating	Latex, Crinkled, Palm coated
Size	7-12
EN388	2X42D

FEATURES



APPLICATIONS



51317

13G HPPE/glass fiber liner with black micro foam nitrile palm coating

SPECIFICATIONS

Gauge	13G
Liner	HPPE/ glass fiber
Coating	Nitrile, Micro Foam, Palm coated
Size	7-12
EN388	4X43D

FEATURES



APPLICATIONS



68317R

13gauge HPPE/glass fiber liner with smooth nitrile plus sandy nitrile double palm coated glove

SPECIFICATIONS

Gauge	13G
Liner	HPPE/glass fiber/polyester
Coating	Nitrile, Smooth+Sandy Finish, palm coated
Size	7-12
EN388	4X43D

FEATURES



APPLICATIONS



72317

13gauge HPPE/glass fiber liner with fully smooth nitrile plus sandy nitrile palm coated glove

SPECIFICATIONS

Gauge	13G
Liner	HPPE/glass fiber/polyester
Coating	Nitrile, Smooth+Sandy Finish, Fully coated
Size	7-12
EN388	4X43D

FEATURES



APPLICATIONS



71334R

13G HPPE/steel/glassfiber liner with 3/4 smooth nitrile plus black sandy nitrile palm coating, thumb crotch reinforced

► SPECIFICATIONS

Gauge	13G
Liner	HPPE/steel/glass fiber/polyester
Coating	Nitrile, Smooth/Sandy foam, 3/4 coated
Size	7-12
EN388	4X43E

► FEATURES



► APPLICATIONS



65323R

13G green HPPE/glass fiber/polyester liner with black foam sandy nitrile palm coating, reinforcement in thumb crotch

► SPECIFICATIONS

Gauge	13G
Liner	HPPE/glass fiber/polyester
Coating	Nitrile, Sandy foam, Palm coated
Size	7-12
EN388	4X43C

► FEATURES



► APPLICATIONS



65328

13G orange HPPE/steel/glass fiber/polyester liner with black sandy foam nitrile palm coating

► SPECIFICATIONS

Gauge	13G
Liner	HPPE/steel/glass fiber/polyester
Coating	Nitrile, Sandy foam, Palm coated
Size	7-12
EN388	4X43D

► FEATURES



► APPLICATIONS



51334R

13G grey HPPE/steel/glass fiber liner with black micro foam nitrile palm coating, reinforcement in the thumb crotch.

► SPECIFICATIONS

Gauge	13G
Liner	HPPE/steel/glass fiber
Coating	Nitrile, Micro Foam, Palm coated
Size	7-12
EN388	4X43E

► FEATURES



► APPLICATIONS



51350

13G HPPE/steel/polyester/nylon/spandex liner with foam nitrile palm coated

► SPECIFICATIONS

Gauge	13G
Liner	HPPE/steel/polyester/nylon/spandex
Coating	Nitrile, Micro Foam, Palm coated
Size	7-12
EN388	4X43F

► FEATURES



► APPLICATIONS



65353

13G HPPE/steel/polyester/spandex liner with sandy nitrile palm coated

► SPECIFICATIONS

Gauge	13G
Liner	HPPE/steel/polyester/spandex
Coating	Nitrile, Sandy foam, Palm coated
Size	7-12
EN388	4X43F

► FEATURES



► APPLICATIONS



51355

13G HPPE/steel/glass fiber/polyester/nylon/spandex liner with foam nitrile palm coated

► SPECIFICATIONS

Gauge	13G
Liner	HPPE/steel/polyester/nylon/spandex
Coating	Nitrile, Micro Foam, Palm coated
Size	7-12
EN388	4X43F

► FEATURES



► APPLICATIONS



CUT RESISTANT SERIES

15 GAUGE CUT

65536R

15G HPPE/steel/polyester liner with sandy foam nitrile palm coated, reinforced thumb crotch

► SPECIFICATIONS

Gauge	15G
Liner	HPPE/steel/polyester/spandex
Coating	Nitrile, Sandy foam, Palm coated
Size	7-12
EN388	4X43D

► FEATURES



► APPLICATIONS



65554

15G HPPE/steel/glass fiber/polyester liner with sandy foam nitrile palm coated

► SPECIFICATIONS

Gauge	15G
Liner	HPPE/steel/glass fiber/polyester/nylon/spandex
Coating	Nitrile, Sandy foam, Palm coated
Size	7-12
EN388	4X43E

► FEATURES



► APPLICATIONS

**65557**

15G HPPE/steel/polyester liner with sandy nitrile palm coated

► SPECIFICATIONS

Gauge	15G
Liner	HPPE/steel/polyester/nylon/spandex
Coating	Nitrile, Sandy foam, Palm coated
Size	7-12
EN388	4X43F

► FEATURES



► APPLICATIONS

**65558**

15G HPPE/steel/glassfiber/nylon/spandex liner with black sandy nitrile palm coated

► SPECIFICATIONS

Gauge	15G
Liner	HPPE/steel/glass fiber/polyester/nylon/spandex
Coating	Nitrile, Sandy foam, Palm coated
Size	7-12
EN388	4X43F

► FEATURES



► APPLICATIONS



CUT RESISTANT SERIES

18 GAUGE CUT

30835R

18G Hi-vis HPPE/steel/polyester liner with white PU palm coating, reinforcement in the thumb crotch

► SPECIFICATIONS

Gauge	18G
Liner	HPPE/steel/polyester
Coating	PU, Palm coated
Size	7-12
EN388	4X42D

► FEATURES



► APPLICATIONS



51831R

18G HPPE/glass fiber/nylon liner with black micro foam nitrile palm coating, reinforcement in the thumb crotch.

► SPECIFICATIONS

Gauge	18G
Liner	HPPE/glass fiber/nylon
Coating	Nitrile, Micro Foam, Palm coated
Size	7-12
EN388	4X41B

► FEATURES



► APPLICATIONS



51829

18G HPPE/steel/nylon/spandex liner with micro foam nitrile palm coated

SPECIFICATIONS

Gauge	18G
Liner	HPPE/steel/nylon/spandex
Coating	Nitrile, Micro foam, Palm coated
Size	7-12
EN388	4X42C

FEATURES



APPLICATIONS



51835R

18G HPPE/steel/polyester liner with black micro foam nitrile palm coating, reinforcement in the thumb crotch

SPECIFICATIONS

Gauge	18G
Liner	HPPE/steel/nylon/spandex
Coating	Nitrile, Micro Foam, Palm coated
Size	7-12
EN388	4X42D

FEATURES



APPLICATIONS



51860T

18G HPPE/steel/ESD yarn knitted liner with foam nitrile palm coated

SPECIFICATIONS

Gauge	18G
Liner	HPPE/steel/ESD yarn
Coating	Nitrile, Micro Foam, Palm coated
Size	7-12
EN388	4X42E

FEATURES



APPLICATIONS



51861T

18G HPPE/steel/ESD yarn knitted liner with black foam nitrile palm coated

► SPECIFICATIONS

Gauge	18G
Liner	HPPE/steel/ESD yarn
Coating	Nitrile, Micro Foam, Palm coated
Size	7-12
EN388	4X42F

► FEATURES



► APPLICATIONS



51862

18G HPPE/steel/polyester/nylon/spandex liner with black foam nitrile palm coated

► SPECIFICATIONS

Gauge	18G
Liner	HPPE/steel/polyester/nylon/spandex
Coating	Nitrile, Micro Foam, Palm coated
Size	7-12
EN388	4X43F

► FEATURES



► APPLICATIONS



CUT RESISTANT SERIES

21 & 24 GAUGE CUT

51170

21G HPPE/nylon/spandex liner with black foam nitrile palm coated

► SPECIFICATIONS

Gauge	21G
Liner	HPPE/nylon/spandex
Coating	Nitrile, Micro Foam, Palm coated
Size	7-12
EN388	3X32C

► FEATURES



► APPLICATIONS



57171R

21G HPPE/nylon/spandex liner with black washed micro foam nitrile palm coated, reinforced thumb crotch

► SPECIFICATIONS

Gauge	21G
Liner	HPPE/nylon/spandex
Coating	Nitrile, Micro Foam, Palm coated
Size	7-12
EN388	3X32D

► FEATURES



► APPLICATIONS



51172

21G HPPE/steel/nylon/spandex liner with foam nitrile palm coated

► SPECIFICATIONS

Gauge	21G
Liner	HPPE/steel/nylon/spandex
Coating	Nitrile, Micro Foam, Palm coated
Size	7-12
EN388	3X32E

► FEATURES**► APPLICATIONS****65178**

21G HPPE/tungsten/nylon/spandex liner with sandy nitrile palm coated

► SPECIFICATIONS

Gauge	21G
Liner	HPPE/tungsten/nylon/spandex
Coating	Nitrile, Micro Foam, Palm coated
Size	7-12
EN388	3X32F

► FEATURES**► APPLICATIONS****51473**

24G HPPE/tungsten/nylon/spandex liner with foam nitrile palm coated, reinforced thumb crotch

► SPECIFICATIONS

Gauge	24G
Liner	HPPE/tungsten/nylon/spandex
Coating	Nitrile, Micro Foam, Palm coated
Size	7-12
EN388	3X32F

► FEATURES**► APPLICATIONS**



WET & COLD RESISTANT SERIES

WET & COLD RESISTANT SERIES

11214 10G acrylic fleeced liner with crinkled latex palm coated

► SPECIFICATIONS

Gauge	10G
Liner	Acrylic terry fleeced
Coating	Latex, Crinkled, Palm coated
Size	7-12
EN388	2242X
EN511	X2X

► FEATURES



► APPLICATIONS



23622 13G acrylic fleeced liner with foam sandy latex palm coated; 3/4 coated available

► SPECIFICATIONS

Gauge	13G
Liner	Acrylic fleeced
Coating	Latex, Sandy finish, palm coated & 3/4 coated
Size	7-12
EN388	2141X
EN511	X1X

► FEATURES



► APPLICATIONS



22501

15G blue nylon with blue smooth latex fully coverage coating plus black foam sandy latex palm coating, fully thumb dipped

► SPECIFICATIONS

Gauge	15G
Liner	Nylon
Coating	Latex, Smooth + Sandy finish, Fully coated
Size	7-12
EN388	3131X

► FEATURES



► APPLICATIONS

**22920**

13G blue nylon/10G Hi vis orange acrylic terry fleeced liner with blue smooth latex fully coverage coating plus black sandy latex palm coating, fully thumb dipped

► SPECIFICATIONS

Gauge	13G+10G
Liner	Nylon/acrylic/terry fleeced
Coating	Latex, Smooth + Sandy finish, Fully coated
Size	7-12
EN388	3231X
EN511	X2X

► FEATURES



► APPLICATIONS

**22937**

13G orange HPPE/glass fibre/steel+10G acrylic terry fleeced liner with orange smooth latex fully coverage coating plus black foam sandy foam latex palm coating, fully thumb coating

► SPECIFICATIONS

Gauge	13G+10G
Liner	HPPE/glass fiber/steel/polyester/ acrylic terry
Coating	Latex, Smooth + Sandy foam finish, Fully coated
Size	7-12
EN388	3X43D
EN511	X2X

► FEATURES



► APPLICATIONS



70920

13G blue nylon/10G Hi viz orange acrylic terry fleeced liner with black sandy foam nitrile 3/4 coverage coating

► SPECIFICATIONS

Gauge	13G+10G
Liner	Nylon/acrylic
Coating	Nitrile, Sandy foam , 3/4 coverage coated
Size	7-12
EN388	4242X
EN511	X2X

► FEATURES



► APPLICATIONS



71920

13G orange nylon/10G Hi-viz orange acrylic terry fleeced liner with black smooth nitrile 3/4 coverage coating plus black sandy foam nitrile palm coating, fully thumb dipped.

► SPECIFICATIONS

Gauge	13G+10G
Liner	Nylon/acrylic
Coating	Nitrile, Smooth + Sandy foam , 3/4 coverage coated
Size	7-12
EN388	4242X
EN511	X2X

► FEATURES



► APPLICATIONS





GENERAL PURPOSE SERIES

GENERAL PURPOSE SERIES

LATEX COATED-Crinkle Finished

11304

13G colorful polyester liner with crinkled latex palm dipped

► SPECIFICATIONS

Gauge	13G
Liner	Polyester
Coating	Latex, Crinkled, Palm coated
Size	7-12
EN388	2121X

► FEATURES



► APPLICATIONS



11007

10G polycotton liner with crinkled latex palm dipped

► SPECIFICATIONS

Gauge	10G
Liner	Polycotton
Coating	Latex, Crinkled, Palm coated
Size	7-12
EN388	2141X

► FEATURES



► APPLICATIONS



GENERAL PURPOSE SERIES

LATEX COATED-Foam Finished

15304 13G white polyester liner with foam latex palm coated

► SPECIFICATIONS

Gauge	13G
Liner	Polyester
Coating	Latex, Foam, Palm coated
Size	7-12
EN388	2121X

► FEATURES



► APPLICATIONS



15303 13G floral polyester liner with foam latex palm coated

► SPECIFICATIONS

Gauge	13G
Liner	Floral polyester
Coating	Latex, Foam, Palm coated
Size	7-12
EN388	2121X

► FEATURES



► APPLICATIONS



GENERAL PURPOSE SERIES

PU COATED

30300

13G nylon liner with PU palm coated

► SPECIFICATIONS

Gauge	13G
Liner	Nylon
Coating	PU, Palm coated
Size	7-12
EN388	3121X

► FEATURES



► APPLICATIONS



30304

13G polyester liner with PU palm coated

► SPECIFICATIONS

Gauge	13G
Liner	Polyester
Coating	PU, Palm coated
Size	7-12
EN388	3121X

► FEATURES



► APPLICATIONS



30306

13G carbon/nylon/spandex knitted liner with white PU palm coating

► SPECIFICATIONS

Gauge	13G
Liner	Carbon/nylon/spandex
Coating	PU, Palm coated
Size	7-12
EN388	3131X

► FEATURES



► APPLICATIONS



30802T

18G blue nylon liner with black super soft PU palm coating, touchscreen

► SPECIFICATIONS

Gauge	18G
Liner	Nylon
Coating	PU, Palm coated
Size	7-12
EN388	2121X

► FEATURES



► APPLICATIONS



30504B

15G Pre-emptively tear designed polyester liner with grey PU palm coated

► SPECIFICATIONS

Gauge	15G
Liner	Polyester
Coating	PU, Palm coated
Size	7-12
EN388	31X1X

► FEATURES



► APPLICATIONS





KNITTING SERIES

KNITTING SERIES

87760

7Gauge beige cotton/polyester knitting glove

► SPECIFICATIONS

Gauge	7G
Liner	Polyester/Cotton
Coating	None
Size	7-12
EN388	0131X

► FEATURES



► APPLICATIONS



87765

7Gauge grey cotton/polyester knitting glove, weight 65 g/pair

► SPECIFICATIONS

Gauge	7G
Liner	Cotton
Coating	None
Size	7-12
EN388	0131X

► FEATURES



► APPLICATIONS



87780D

7Gauge grey cotton/polyester knitting glove palm with pvc dots,weight 80g/pair

► SPECIFICATIONS

Gauge	10G
Liner	Cotton
Coating	PVC Dots, Palm
Size	7-12
EN388	0131X

► FEATURES



► APPLICATIONS



87045

10G white polyester knitted glove, 45g/pair

► SPECIFICATIONS

Gauge	10G
Liner	Polyester
Coating	PVC Dots, Palm
Size	7-12
EN388	2X4X

► FEATURES



► APPLICATIONS



87004D

10G blue polyester yarn knitted liner with PVC dots on palm

► SPECIFICATIONS

Gauge	10G
Liner	Polyester
Coating	PVC Dots, Palm
Size	7-12
EN388	2X4X

► FEATURES



► APPLICATIONS



89343

13G HPPE/glass fiber knitted sleeve

► SPECIFICATIONS

Gauge	13G
Liner	HPPE/glass fiber
Coating	None
Size	40/45cm
EN388	3X42D

► FEATURES



► APPLICATIONS



CE

EN388
3X42D**893FY**

13G HPPE/glass fiber/steel/spandex/polyester sleeve, sew velcros

► SPECIFICATIONS

Gauge	13G
Liner	HPPE/steel/glass fiber
Coating	None
Size	29/45cm
EN388	2X42F

► FEATURES



► APPLICATIONS



CE

EN388
2X42F**89388**

13G HPPE/glass fiber/spandex/polyester sleeve, one end knitted and other end with Thumb hole

► SPECIFICATIONS

Gauge	13G
Liner	HPPE/glass fiber
Coating	None
Size	29/45cm
EN388	2X42C

► FEATURES



► APPLICATIONS



CE

EN388
2X42C

IMPACT SERIES



IMPACT SERIES

51323VL

13G HPPE/glass fiber/spandex liner with black unwashed micro foam nitrile palm dipped, PVC impact on back, reinforced in thumb crotch

► SPECIFICATIONS

Gauge	13G
Liner	HPPE/glass fiber/spandex
Coating	Nitrile, Micro Foam, Palm coated
Size	7-12
EN388	4X43CP

► FEATURES



► APPLICATIONS



65317VL

13G HPPE/glass fiber liner with black sandy nitrile palm coating, TPR impact on back, leather reinforced in thumb crotch, + palm EVA impact palm swen + cuff velcro with logo

► SPECIFICATIONS

Gauge	13G
Liner	HPPE/glass fiber/spandex
Coating	Nitrile, Micro Foam, Palm coated
Size	7-12
EN388	4X43DP

► FEATURES



► APPLICATIONS



65554VL

15G CUT E liner with black sandy nitrile palm dipped, TPR impact sewn on back, nitrile reinforced in thumb crotch

► SPECIFICATIONS

Gauge	15G
Liner	HPPE/steel/glass fiber/nylon/spandex
Coating	Nitrile, Sandy foam, Palm coated
Size	7-12
EN388	4X43EP

► FEATURES



► APPLICATIONS



65351VL

13G HPPE/steel liner with black sandy foam nitrile palm coating, TPR impact sewn on back, leather reinforced in thumb crotch

► SPECIFICATIONS

Gauge	13G
Liner	HPPE/steel
Coating	Nitrile, Sandy foam, Palm coated
Size	7-12
EN388	4X43FP

► FEATURES



► APPLICATIONS



02317VL

Leather plus Cut resistant inner lining glove with TPR on back, reinforced in thumb crotch

► SPECIFICATIONS

Gauge	13G
Liner	HPPE/steel
Coating	Nitrile, Sandy foam, Palm coated
Size	7-12
EN388	4X43DP
EN407	X1XXXX

► FEATURES



► APPLICATIONS



CHEMICAL SERIES



CHEMICAL SERIES

47501

100% cotton seamless knitted liner with blue full coverage smooth PVC coating, rough sandy surface treatment on palm

► SPECIFICATIONS

Gauge	13G
Liner	100% cotton
Coating	PVC, Smooth + Sandy finish, Fully coated
Size	27cm, 30cm, 35cm, 40cm, 45cm
EN388	4121

► FEATURES



► APPLICATIONS



43501

100% cotton seamless knitted liner with red full coverage smooth PVC coating

► SPECIFICATIONS

Gauge	13G
Liner	100% cotton
Coating	PVC, Smooth, Full coverage coated
Size	27cm, 30cm, 35cm, 40cm, 45cm
EN388	3121

► FEATURES



► APPLICATIONS



78800

18G nylon/spandex liner with purple full coverage smooth nitrile coating, sandy nitrile palm coated 33cm

► SPECIFICATIONS

Gauge	18G
Liner	Nylon/spandex
Coating	Nitrile, Fully smooth, sandy finish palm
Size	33cm
EN388	4121X
EN407	X1XXXX

► FEATURES



► APPLICATIONS



78835

18G CUT D liner with fully smooth nitrile coating, sandy nitrile palm coated 33cm

► SPECIFICATIONS

Gauge	18G
Liner	HPPE/glassfiber/nylon/spandex
Coating	Nitrile, Fully smooth, sandy finish palm
Size	33cm
EN388	4X43D
EN407	X1XXXX

► FEATURES



► APPLICATIONS



91835

18G liner with black fully smooth Neoprene coating, sandy neoprene palm coated 35cm

► SPECIFICATIONS

Gauge	18G
Liner	HPPE/glassfiber/nylon/spandex
Coating	Neoprene , Fully smooth, sandy finish palm
Size	35cm
EN388	4X43D
EN407	42XXXX

► FEATURES



► APPLICATIONS

EN388
4X43DEN407
42XXXXEN374
AJKL
MNOPT**91835V**

18G liner with black fully smooth Neoprene coating, sandy neoprene palm coated 35cm

► SPECIFICATIONS

Gauge	18G
Liner	HPPE/glassfiber/nylon/spandex
Coating	Neoprene , Fully smooth, sandy finish palm
Size	35cm
EN388	4X43DP
EN407	42XXXX

► FEATURES



► APPLICATIONS

EN388
4X43DPEN407
42XXXXEN374
AJKL
MNOPT

SUSTAINABILITY IN MEGA SAFETY



As one of leading professional glove manufacturer and supplier in China, Mega safety has been dedicated to pioneering sustainable development to minimize our impact on the environment for a more sustainable future.

We're developing products, packaging, manufacturing processes, and partnerships that Sustainability in safety gloves focuses on reducing environmental impact through raw materials, renewable, or recycled components, alongside cleaner manufacturing processes.

Eco-friendly Materials

We are working to incorporate biodegradable nitrile which breaks down faster in landfills and eco-friendly materials include natural rubber latex, recycled polyester and nylon for gloves.



Manufacturing Improvements

We are working to reduce the carbon footprint in manufacturing by using renewable energy, implementing advanced water recycling systems for wastewater treatment, and utilizing exhaust gas recovery systems.



RTO-Waste Gas Treatment System



Solar Energy System



Waste Water Treatment Station

Certifications and Standards



Look for certifications like OEKO-TEX and GRS for assurance of sustainable and ethical production.

Packaging

We are transitioning to packaging that minimizes our environmental impact

- Using recycled and recyclable materials
- Displacing plastic with biodegradable and recycled options
- Reducing ink on printed items

Extending Product Lifecycles

We're developing new programs with customers and other partners to enhance the durability of gloves allows for potential reuse, which significantly reduces waste.

SUSTAINABLE SAFETY SERIES

GRS GLOVES

51541G 15G white/black recycled polyester knitted liner with micro foam nitrile palm coating

► SPECIFICATIONS

Gauge	15G
Liner	Recycled polyester
Coating	Nitrile, Micro Foam, Palm coated
Size	7-12
EN388	4121X

► FEATURES



► APPLICATIONS



65542G 15G recycled color polyester liner with black foam sandy nitrile palm coated

► SPECIFICATIONS

Gauge	15G
Liner	Recycled color polyester
Coating	Nitrile, Sandy foam, Palm coated
Size	7-12
EN388	4121X

► FEATURES



► APPLICATIONS



65323G

13G red recycled polyester/HPPE/glass fiber knitted liner with black foam sandy nitrile palm coating

► SPECIFICATIONS

Gauge	13G
Liner	Recycled polyester/HPPE/glass fiber
Coating	Nitrile, Sandy foam, Palm coated
Size	7-12
EN388	4X42C

► FEATURES



► APPLICATIONS



CE



EN388

4X42C



A3

SUSTAINABLE SAFETY SERIES

FOOD CONTACT GLOVES

88536

15G blue HPPE/steel/glass fiber/spandex knitting without coating

► SPECIFICATIONS

Gauge	15G
Liner	HPPE/steel/glass fiber/spandex
Coating	None
Size	7-12
EN388	3X42D

► FEATURES



► APPLICATIONS



CE



EN388

3X42D

A4

88345

13G HPPE/steel/spandex knitting glove, food-contact

► SPECIFICATIONS

Gauge	13G
Liner	HPPE/steel/spandex
Coating	None
Size	7-12
EN388	3X42F

► FEATURES**► APPLICATIONS****36500**

15gauge blue nylon liner with waterborne PU coating glove, food-contact

► SPECIFICATIONS

Gauge	15G
Liner	nylon
Coating	waterborne PU, Palm coated
Size	7-12
EN388	3131X

► FEATURES**► APPLICATIONS****95323**

13 gauge HPPE/glassfiber/spandex knitted liner with clear silicone palm coated

► SPECIFICATIONS

Gauge	13G
Liner	HPPE/glassfiber/spandex
Coating	Clear silicone, Palm coated
Size	7-12
EN388	4X43C

► FEATURES**► APPLICATIONS**

SUSTAINABLE SAFETY SERIES

BAMBOO & ANTI-BACTERIAL GLOVES

15319

13G bamboo/spandex liner with foam latex palm coated glove

► SPECIFICATIONS

Gauge	13G
Liner	bamboo/spandex
Coating	foam latex, Palm coated
Size	7-12
EN388	2121X

► FEATURES



► APPLICATIONS



18304AB

13G antibacterial polyester liner with sandy latex palm coated glove

► SPECIFICATIONS

Gauge	13G
Liner	antibacterial polyester
Coating	foam latex, Palm coated
Size	7-12
EN388	3131X

► FEATURES



► APPLICATIONS

